

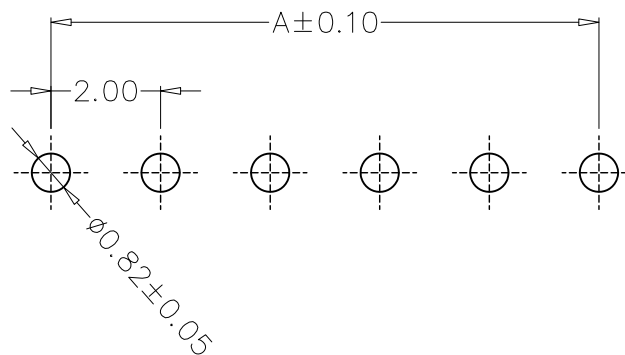


SPECIFICATIONS


- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 100V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{M}\Omega$ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material: Wafer PBT, UL94V-0
PIN Brass Tin-plated

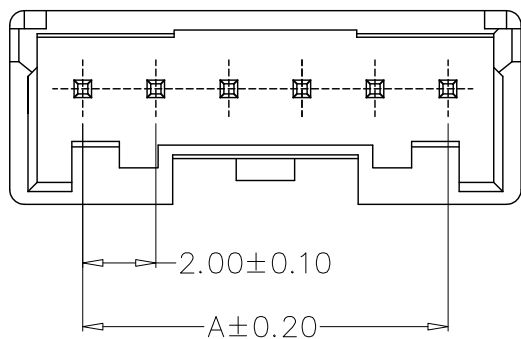

PCB LAYOUT

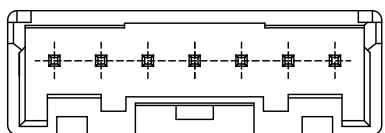

7~9A

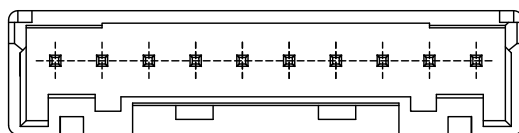

10~16A

| 编 号 | 尺寸 (mm) | |
|-----------|---------|-------|
| | A | B |
| A2026-02A | 2.00 | 6.00 |
| A2026-03A | 4.00 | 8.00 |
| A2026-04A | 6.00 | 10.00 |
| A2026-05A | 8.00 | 12.00 |
| A2026-06A | 10.00 | 14.00 |
| A2026-07A | 12.00 | 16.00 |
| A2026-08A | 14.00 | 18.00 |
| A2026-09A | 16.00 | 20.00 |
| A2026-10A | 18.00 | 22.00 |
| A2026-11A | 20.00 | 24.00 |
| A2026-12A | 22.00 | 26.00 |
| A2026-16A | 30.00 | 34.00 |

| | | | | | | | | | |
|-------------------|------------|----------|------------|----|--------------|----------------|--|---------------------|-----|
| GENERAL TOLERANCE | | 制图 | 钱岳生 | | 料号 | A2026-NA | | 版本 | A |
| X.±0.25 | X.*±2' | DRAWING | 2021、05、03 | | PART NO. | PA直针 | | REV. | 1/1 |
| .X±0.20 | .X'±1' | 审核 | 张名 | | TITLE | WAFER DIP TYPE | | SHEET | 1/1 |
| .XX±0.15 | .XX'±0.5' | CHECK | 2021、05、04 | | 客户料号 | | | | |
| .XXX±0.10 | .XXX'±0.5' | 核准 | 张名 | | CUTM. NO. | | | | |
| | | APPROVAL | 2021、05、05 | | 深圳市金航标电子有限公司 | | | www.kinghelm.com.cn | |
| | | 单位 | MM | 比例 | 1:1 | KH-A2026-04A | | 0755-28190160 | |