


Kinghelm®

REVISIONS			
REV NUMBER	DESCRIPTION	DWN	CHK DATE
A	DESIGN		

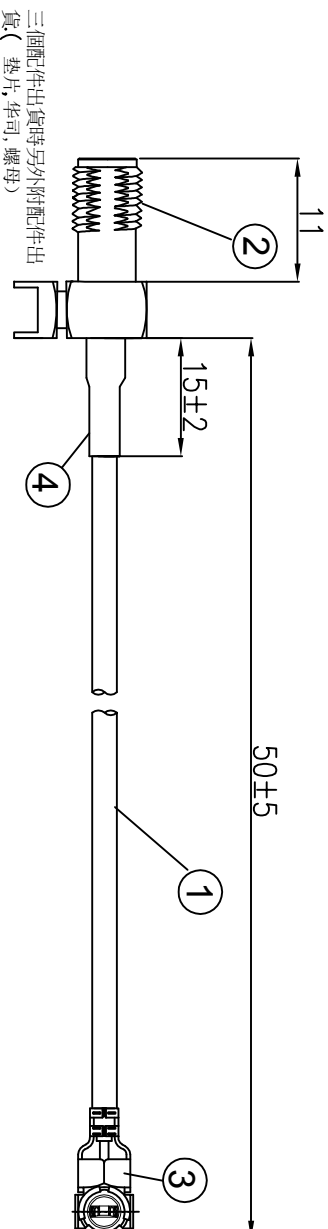

NOTES:

- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPENS/SHORT, MISWIRING AND INTERMITTENT FAILURES.
- MATERIAL:
 - SEE TABLE
- ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿I-PEX, 1.13端子, 镀金	1
②	接头	SMA母头母针, 带4个脚, 11牙, 镀金	1
①	同轴线	RF1.13黑线, OD:1.13mm	AS

深圳市金航标电子有限公司 WWW.BDS666.COM

KH-IPEXA-SMAKWE-B050H 0755-83044319

ALL DIMENSION ARE IN MM		DRAWN	DATE
CHKD.	James	James	2021-10-30
APPD.	Frank	Frank	2021-10-30
COMPUTER GENERATED IN SOLIDWORKS	Scott		2021-10-30

DO NOT SCALE THIS DRAWING

GENERAL TOLERANCE FOR ANGLES: X.XX ± 1° ± 0.5 0.25 0.150

I-PEX 1.13 TO SMA /F L=50mm

SIZE Number REV

B K.XXX A

SCALE: Free TYPE SHEET 1 OF

CUSTOMER P/N:

4

3

1

2

1

A

B

C

D

A

B

C

D